

Milenidome, Lda.

Para Sua Segurança




SPECIFICATIONS

| | |
|-------------------------------|---|
| Taille du capteur | 22mm X 20mm |
| Dimensions | 153mm X 85mm X 38mm |
| Temps de capture | <1.2 secondes |
| Angle de capture | 145° |
| Vitesse de vérification | <1.5 secondes |
| False acceptance rate | <0.0001% |
| Faux rejet en %: | <0.001% |
| Mode d'identification | 1:N or 1:n |
| Capacité de stockage | 3000 empreintes. |
| Backup option | Empreinte ou mot de passe |
| Fonctionnement: | Autonome |
| Mémoire d'événements | 30000 événements |
| Communication | RS-232, RS-485, TCP/IP, Wiegand26 |
| Sortie | Wiegand 26, support all wiegand 26 access controller |
| Anti-static capability | <40kV |
| Humidité de fonctionnement | 20%-80% |
| Température de fonctionnement | -5°C-60°C |
| Taux d'humidité de stockage | 20%-80% |
| Température de stockage | 10°C-65°C |
| Alimentation | 12VDC@1A with access controller for port 3 or 5VDC@1A or 6V@1A for po |
| Consommation | <2W |
| Language | Anglais, Français |
| Dimensions | 28mm X 24.5mm X 8mm |
| Poids unitaire | 1.5kg |

DEVICE LAYOUT

Power Supply (Two ports: one is 12V / 1A Via PORT3 port, and another is 5V /1A or 6A/1A Via power adapter)

Note: New PFP-3700V (Since 30/8/2006) can support +6V or +12V input via PORT 1, but only the new de

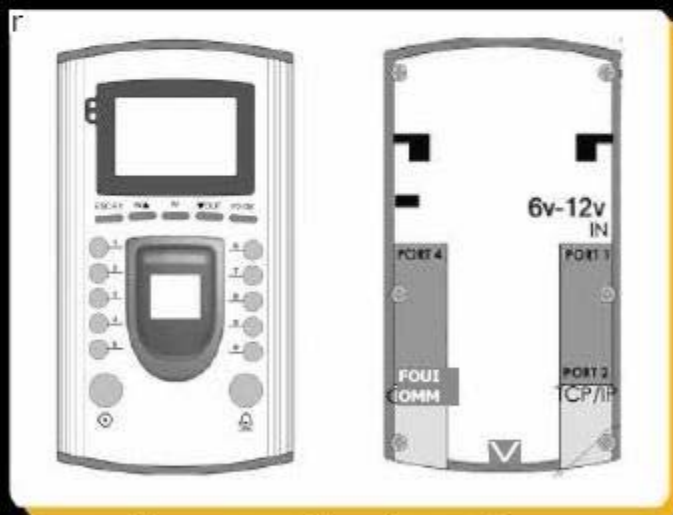

Wiegand 26 (Output via PORT3 port as two lines: DATA() and DATAI)

RS232 or RS485 (Output via the same PORT3 port as five line: RS232 TX,RX GND,RS485 A+,B-)

10M Ethernet (Via another PORT2 port)

DESCRIPTIONS:

